

ELLIOTT



I40F

HIREACH AERIAL

STANDARD COMPONENTS

- Insulated 40" x 60" top-mount work platform with lanyard loops, harnesses, and grated fiberglass floor.
- Hydraulic platform leveling system with twin cylinders and remote re-leveling controls.
- Fiberoptic single joystick platform controls with backup power supply.
- Continuous turret rotation via hydraulic motor and self-locking gearbox.
- "A"-type main outriggers with 12' spread and auxiliary underslung outriggers with 8' spread.
- High-strength rectangular boom with fiberglass section for insulation.
- Full-length welded subframe with integral outrigger mounts.
- Heavy-duty hydraulic system (2,500 PSI) with 35-gallon oil tank.
- PTO with in-cab indicator lights and engine controls.
- ANSI A92.2 Certified.
- Lifetime Structural Warranty.

Smooth Point-and-Shoot Operation

Full hydraulic boom extension delivers quick, precise positioning with minimal effort.

Spacious, Insulated Work Platform

Oversized 40" x 60" fiberglass-top platform supports 600 lbs, with integrated grounding lugs and safety harnesses for two operators.

Heavy-Duty Material Handling

Optional 3,650 lb main winch or 500 lb platform jib expands functionality for utility and construction applications.

Stable, All-Around Reach

Industry-leading 45' working height and 30' side reach with 360° turret rotation for maximum coverage.

FULL SPECS:



402.592.4500 | SALES@ELLIOTTEQUIP.COM | ELLIOTTEQUIP.COM





I40F


HIREACH AERIAL

MAXIMUM WORKING LOADS PLATFORM JIB OPERATION

MODEL I40

TOTAL LIFT CAPACITY (JIB LOAD PLUS PERSONNEL)

AVOID JERKING LOAD - 360° RADIUS

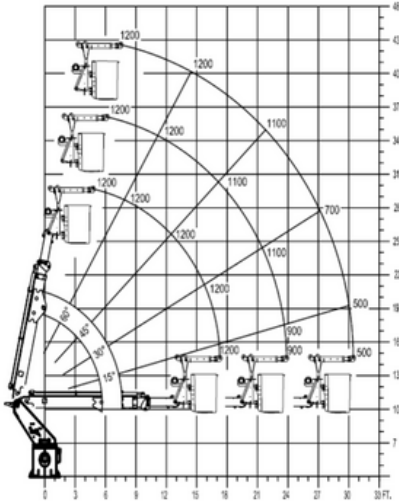

JIB 1,000 LBS. MAX PERSONNEL 600 LBS. MAX

OPTIONS

- 3,650 lb or 2,000 lb capacity boom winch.
- 500 lb capacity platform jib attachment
- Radio remote control system
- MH outriggers with shortjacking and automatic safety rotation lockout
- Outrigger pad holders
- Bed-mounted accessories (welders, power washers, generators)
- Platform accessories (110V outlets, hydraulic tool circuits, welding leads, etc.)
- Pin-on outrigger extensions
- Red, White or Custom Paint Colors
- Additional Customization for Your Unique Application

SPECIFICATIONS

Working Height	45' / 13,7 m
Working Side Reach	30' / 9,1 m
Platform Capacity	600 lbs / 272 kg
Platform Size	40 x 60 in / 102 x 152 cm
Platform Type	Insulated Top-Mount
Main Winch Capacity	3,650 lbs / 1,656 kg
Insulation Rating	46kV, Category C
Powered Boom Sections	3
Overall Height	11'4" / 3,5 m
Unit Weight (Bare)	16,800 lbs / 7,620 kg
Outrigger Spread (Main)	12' / 3,6 m
Outrigger Spread (Auxiliary)	8' / 2,4 m
Front Axle GAWR	10,000 lbs / 4,536 kg
Rear Axle GAWR	19,000 lbs / 8,618 kg
Truck Chassis Requirement	120" CA, 25,999 lb GVWR minimum

