

ELLIOTT



STANDARD FEATURES

- 360° Continuous Rotation
- EZ Crib Outriggers with 26' Spread
- SMARTControls CAN Bus Control System
- Ride-Around Seated Operator Control Console
- Radio Remote Controls with Information Display
- Quick-Connect Hydraulic Tool Circuits (7 GPM)
- Platform-Stored Rotating Jib Winch
- Steel Bed Wings with Military-Grade Non-Skid Coating
- Load Moment Indicator (LMI) System
- Lifetime Structural Warranty

E210i

E-LINE AERIAL

VIDEO:



FULL SPECS:



Three-Machines-in-One Versatility

Interchangeable boom configurations allow the E210i to function as a material-handling aerial platform, an insulated live-line machine, or a steel construction boom—maximizing utilization and reducing fleet costs.

Extended Reach with Jobsite Flexibility

Up to 210' of working height with steel or insulated booms delivers exceptional access for transmission, distribution, and construction applications.

High-Capacity, Rotating Work Platforms

Large 36" × 72" or 40" × 72" platforms with rotation provide a stable, spacious, and efficient work environment for personnel and material handling.

Built for Durability & Compliance

High-strength steel construction, oversized wear pads, and a robust hydraulic system ensure long service life. Backed by Elliott's Lifetime Structural Warranty and fully ANSI A92.2 compliant.

402.592.4500 | SALES@ELLIOTTEQUIP.COM | ELLIOTTEQUIP.COM




OPTIONS


- 21' 500kV Insulated Articulating Boom
- 21' Steel Articulating Boom
- 40" x 72" or 36" x 72" Work Platform Configurations
- 750 lb or 1,200 lb Platform Capacity Options
- Material-Handling Jib Winch Configurations
- Additional Hydraulic Tooling Packages
- Custom Bed & Storage Configurations

BOOM RANGE DIAGRAM WITH PLATFORM ATTACHED TO MAIN BOOM

PLATFORM CAPACITY
1200 LBS MAX
PLATFORM JIB CAPACITY
1500 LBS MAX




USE OUTRIGGERS AT ALL TIMES
MAX WIND SPEED ALLOWABLE 20 MPH.
DO NOT OPERATE IN WIND SPEEDS
ABOVE 20 MPH

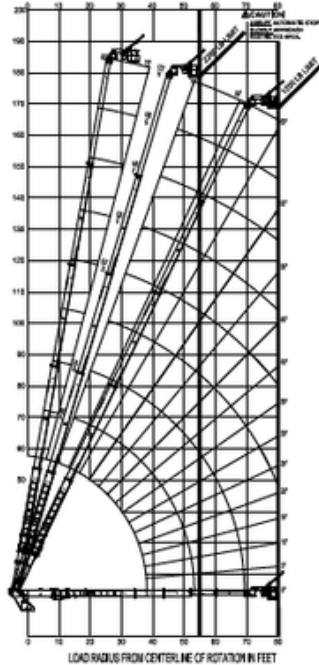


BOOM RANGE DIAGRAM WITH PLATFORM ATTACHED TO JIB

PLATFORM CAPACITY
750 LBS MAX

PLATFORM LOAD	JIB ANGLE
650 LBS	-20° to 20°
750 LBS	-90° to -20° 20° to 85°



USE OUTRIGGERS AT ALL TIMES
MAX WIND SPEED ALLOWABLE 20 MPH.

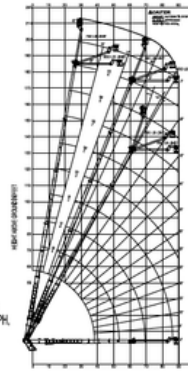

SPECIFICATIONS

Maximum Working Height

190' / 57.9 m

Maximum Working Height

210' / 64.3 m

Platform Capacity (MH Mode)

1,200 lb / 544 kg

Platform Capacity (Insulated / Steel Boom)

750 lb / 340 kg

Platform Size

36" x 72" / 91 x 183 cm or 40" x 72" / 102 x 183 cm

Platform Rotation

85° Left / 85° Right

Jib Winch Capacity

1,500 lb / 680 kg

Outrigger Spread

26' / 7.9 m

Travel Length

48' / 14.6 m (56' / 17.1 m)

Maximum Travel Height

13'6" / 4.1 m

Rotation

360° Continuous