

# ELLIOTT



# E160

## E-LINE AERIAL

### STANDARD FEATURES

- Platform Working Height: 160' min, 215' max
- 36" x 72" gravity leveled platform, 1200 lbs. capacity
- Platform tool circuit for hydraulic accessories
- 15,000 lb hydraulic winch with 425' synthetic rope
- Radio and wired backup platform controls with LMI display
- Electronic work envelope/LMI with anti-two block
- Ride-around lower control console with seat
- 'EZ-Crib' outriggers: 21'2" front span, 26'2" rear span
- 5-section steel boom – 160' tip height without jib
- Reinforced hydraulic hoses
- 119- gallon aluminum hydraulic reservoir
- Reverse offset one-piece turret with 360° continuous rotation
- Lifetime Structural Warranty
- ANSI A92.2 compliant

### Industry-Leading Reach

The E160 delivers a maximum platform height of 210' and a working height of 215', giving crews the ability to tackle the tallest structures with fewer setups and increased efficiency.

### Heavy-Duty Work Platform

A 36" x 72" gravity-leveled steel platform with integrated safety rails, dual harnesses, and hydraulic tool connections ensures operator safety and productivity in demanding environments.

### Powerful, Precise Lifting

A 10,000 lb single line pull hydraulic winch with 425' of synthetic rope handles heavy loads with control, while proportional boom and winch controls provide smooth, accurate operation.

### Built for Durability & Compliance


High-strength steel construction, oversized wear pads, and a robust hydraulic system ensure long service life. Backed by Elliott's Lifetime Structural Warranty and fully ANSI A92.2 compliant.

### Stable, Confident Operation

Dual 'EZ-Crib' out-and-down outriggers that maximizes stability on any jobsite, supporting full performance even in challenging conditions.

402.592.4500 | SALES@ELLIOTTEQUIP.COM | ELLIOTTEQUIP.COM



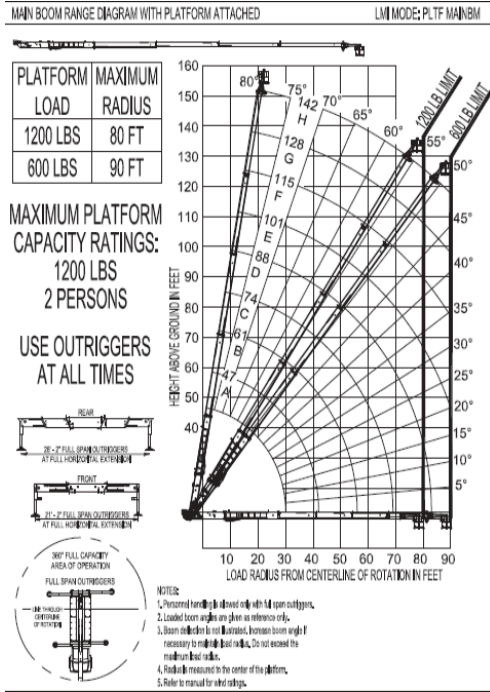

## OPTIONS

- Safety Lighting
- Outrigger Pads
- Hydraulic Tank Heater
- Automatic Rotation Lockout
- Below Bed Tool Circuit
- 110v Auxiliary Power
- And more additional options & configurations – contact factory or dealer

VIDEO:



FULL SPECS:



## SPECIFICATIONS

Maximum Working Height

215' / 65.5 m

Main Boom Length

155' / 47.2 m

Jib Lengths

32'-55' / 9.8-16.7 m

Working Area

360 Degrees

Lifting Capacity

20,000 lbs / 9,072 kg

Platform Capacity

1,200 lbs / 544 kg

Platform Size

36" x 72" / 91 x 183 cm

Certification

ANSI A92.2

Boom Sections

5

Overall Height

13'1" / 4 m

Operator Controls

Ride-Around Seated

Outrigger Type Front

Out-Down

Outrigger Spread Front

21'2" / 6.4 m

Outrigger Type Rear

Out-Down

Outrigger Spread Rear

26'2" / 8 m

Minimum GVWR

86,000 lbs / 39 000 kg