

ELLIOTT



STANDARD FEATURES

- 87' Working height, 77' working side reach on 25,999 lb. chassis on non-CDL chassis
- Up to 3,300 lbs. of toolbox capacity
- 600 lb. platform capacity
- 160-degree platform rotation
- User choice of single-stick or four-stick remote controls
- Short-jack capability with one side vertical outrigger deployment for work in confined spaces
- Lifetime Structural Warranty
- Certified to ANSI A92.2

M87

HIREACH



Stow & Go Jib Winch

Elliott's exclusive jib winch design stows directly in the platform, requiring no assembly and eliminating guesswork. With a 500 lb capacity in all positions, operators gain reliable lifting capability that reduces setup time and improves efficiency on every job.

180° Platform Rotation

The oversized platform rotates a full 180 degrees, giving crews maximum access to the work area from a single setup. This flexibility allows faster positioning, fewer truck moves, and improved productivity in congested or hard-to-reach job sites.

Versatile Material Handling

With a 2,000 lb main boom material handling capacity, the M87 adds powerful lifting functionality to its aerial capabilities. Crews can lift heavy components directly from the ground or truck bed to the work area, reducing the need for additional equipment and streamlining operations.

Heavy Duty Structural Integrity

Built with a robust subframe, turret, bearing, outriggers, and boom, the M87 is engineered for a smooth ride and exceptionally long service life. Backed by Elliott's lifetime structural warranty, this design provides dependable performance, lower maintenance costs, and long-term value.


402.592.4500 | SALES@ELLIOTTEQUIP.COM | ELLIOTTEQUIP.COM



MAIN BOOM LOAD RATINGS

WITH PLATFORM REMOVED*

DEDUCT 350 LBS. WITH PLATFORM ATTACHED

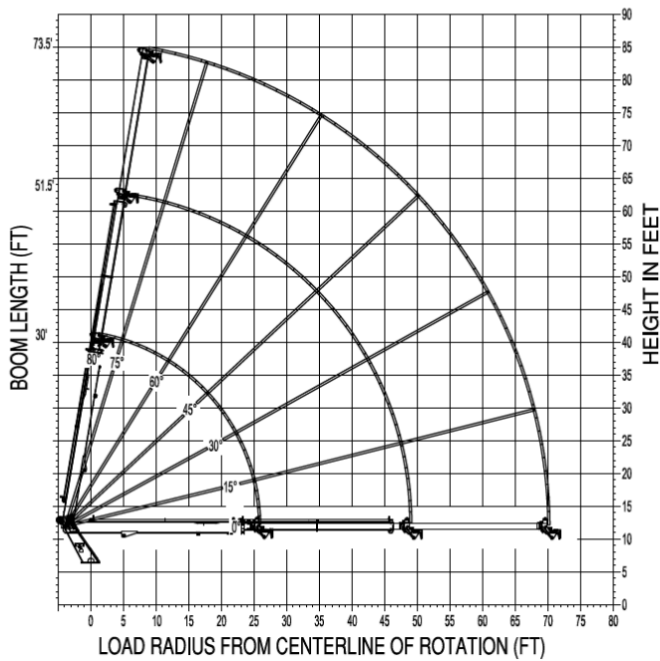

OPTIONS

- 500 lb Capacity Stow & Go Jib Winch in Platform
- 2,000 lb Capacity Main Boom Winch
- 110 V Power Outlet in Platform
- Walkway Access to Platform
- Steel or Aluminum Toolboxes
- Steel, Wood or Aluminum Flatbed
- Rear Step Bumper
- Composite or Wooden Outrigger Pads w. Holders
- Custom Paint Colors
- And more additional options & configurations – contact factory or dealer

VIDEO:



FULL SPECS:



SPECIFICATIONS

Working Height	87' / 25,5 m
Working Side Reach	77' / 23,5 m
Platform Capacity	600 lb / 272 kg
Main Winch Capacity	2,000 lb / 907 kg
Jib Winch Capacity	500 lb / 227 kg
Front Outrigger Spread	14' 6" / 4,4 m
Rear Outrigger Spread	18' 4" / 5,6 m
Minimum GVWR	25,999 lb / 11,793 kg