


ELLIOTT



STANDARD FEATURES

- 2-Section Boom
- Top-Mount 40" x 60" Platform (1,000 lb Capacity)
- 5,900 lb Main Winch
- 1,000 lb Platform Jib
- Continuous Rotation
- Hydraulic Platform Leveling
- "A" Frame Outriggers
- ANSI A92.2 Certified

G40F

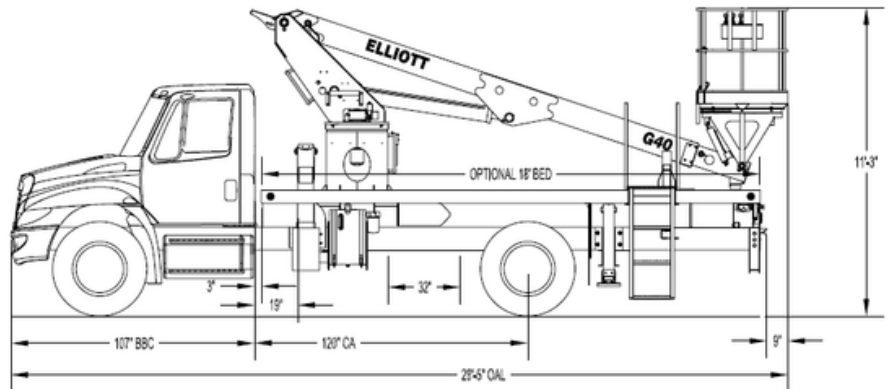

HiReach

Compact Entry-Level Performance

45' working height and 30' side reach provide efficient access for light-duty applications.

Higher Platform Capacity

1,000 lb platform capacity supports heavier tools and materials directly in the platform.

Integrated Material Handling


5,900 lb winch and 1,000 lb jib allow lifting capability without additional machines.

Simple, Reliable Operation

Straightforward hydraulic controls and durable construction deliver consistent jobsite performance.

402.592.4500 | SALES@ELLIOTTEQUIP.COM | ELLIOTTEQUIP.COM



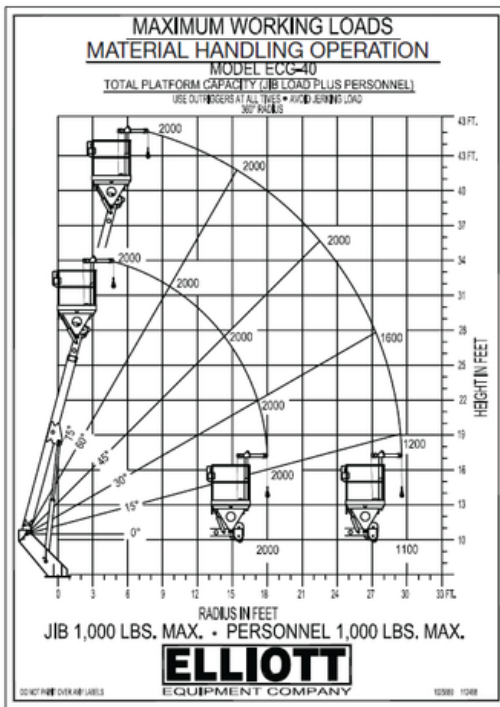

OPTIONS

- Radio Remote Control
- Material Handling Jib
- Boom-Mounted Winch (2-Speed)
- Outrigger Pad Holders
- Bed Accessories (Welders, Generators, etc.)
- Platform Accessories (110V, Hydraulic Tools, etc.)
- Custom Toolboxes & Line Body Configurations

FULL SPECS:



SPECIFICATIONS

Working Height	45' / 13.7 m
Working Side Reach	30' / 9.1 m
Platform Capacity	1,000 lb / 454 kg
Platform Size	40" × 60" / 102 × 152 cm
Main Winch Capacity	5,900 lb / 2,676 kg
Jib Winch Capacity	1,000 lb / 454 kg
Powered Boom Sections	2
Overall Height	11'3" / 3.4 m
Unit Weight	10,000 lb / 4,536 kg
Outrigger Spread (Main)	12'6" / 3.8 m
Outrigger Spread (Auxiliary)	8' / 2.4 m