ELLIOTT
A STELLAR COMPANY



E160

E-LINE AERIAL

STANDARD FEATURES

- Platform Working Height: 160' min, 215' max
- 36" x 72" gravity leveled platform, 1200 lbs. capacity
- Platform tool circuit for hydraulic accessories
- 15,000 lb hydraulic winch with 425' synthetic rope
- Radio and wired backup platform controls with LMI display
- Electronic work envelope/LMI with anti-two block
- Ride-around lower control console with seat
- 'EZ-Crib' outriggers: 21'2" front span, 26'2" rear span
- 5-section steel boom – 160' tip height without jib
- Reinforced hydraulic hoses
- 119- gallon aluminum hydraulic reservoir
- Reverse offset one-piece turret with 360° continuous rotation
- Lifetime Structural Warranty
- ANSI A92.2 compliant

Industry-Leading Reach

The E160 delivers a maximum platform height of 210' and a working height of 215', giving crews the ability to tackle the tallest structures with fewer setups and increased efficiency.

Heavy-Duty Work Platform

A 36" x 72" gravity-leveled steel platform with integrated safety rails, dual harnesses, and hydraulic tool connections ensures operator safety and productivity in demanding environments.

Powerful, Precise Lifting

A 10,000 lb single line pull hydraulic winch with 425' of synthetic rope handles heavy loads with control, while proportional boom and winch controls provide smooth, accurate operation.

Built for Durability & Compliance

High-strength steel construction, oversized wear pads, and a robust hydraulic system ensure long service life. Backed by Elliott's Lifetime Structural Warranty and fully ANSI A92.2 compliant.

Stable, Confident Operation


Dual 'EZ-Crib' out-and-down outriggers that maximizes stability on any jobsite, supporting full performance even in challenging conditions.

402.592.4500 | SALES@ELLIOTTEQUIP.COM | ELLIOTTEQUIP.COM

BUILT FOR YOU ELLIOTT SINCE 1948

ELLIOTT
A STELLAR COMPANY

E160
E-LINE AERIAL

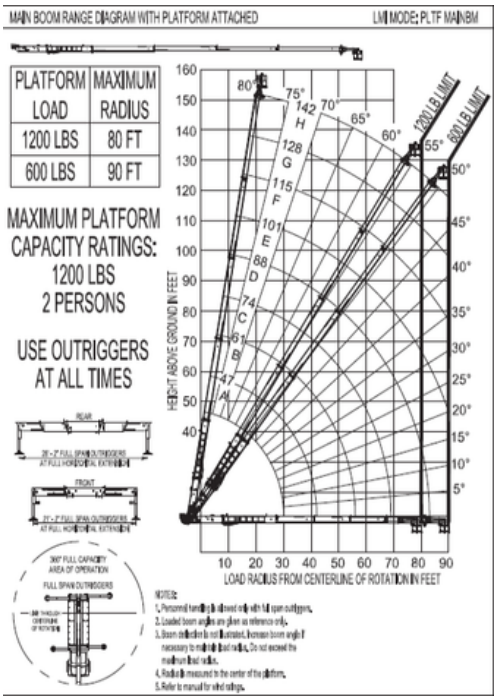

OPTIONS

- Safety Lighting
- Outrigger Pads
- Hydraulic Tank Heater
- Automatic Rotation Lockout
- Below Bed Tool Circuit
- 110v Auxiliary Power
- And more additional options & configurations – contact factory or dealer

VIDEO:

FULL SPECS:

SPECIFICIATIONS

Maximum Working Height	215′ / 65.5 m
Main Boom Length	155′ / 47.2 m
Jib Lengths	32′-55′ / 9.8-16.7 m
Working Area	360 Degrees
Lifting Capacity	20,000 lbs / 9,072 kg
Platform Capacity	1,200 lbs / 544 kg
Platform Size	36″ x 72″ / 91 x 183 cm
Certification	ANSI A92.2
Boom Sections	5
Overall Height	13′1″ / 4 m
Operator Controls	Ride-Around Seated
Outrigger Type Front	Out-Down
Outrigger Spread Front	21′2″ / 6.4 m
Outrigger Type Rear	Out-Down
Outrigger Spread Rear	26′2″ / 8 m
Minimum GVWR	86,000 lbs / 39 000 kg