ELLIOTT
A STELLAR COMPANY



E190

E-LINE AERIAL

STANDARD FEATURES

- Max Working Height: 190′ (202′ with jib)
- 36″ x 72″ gravity-leveled steel platform with rails, harnesses, and hydraulic tool circuit
- 15,000 lb hydraulic winch with 425′ synthetic rope
- Radio and wired backup platform controls with LMI display
- Electronic work envelope / LMI with anti-two block protection
- ERFSD speed reduction for smooth boom operation at full extension
- Elliott ride-around lower control console with seat
- ‘EZ-Crib’ outriggers – 26′2″ span front and rear with interlocks
- 5-section proportional steel boom – 181′ max tip height
- Reinforced hydraulic hoses (4:1 safety factor)
- 188-gallon hydraulic reservoir closed-center hydraulic tank
- One-piece offset turret with 360° continuous rotation
- Lifetime structural warranty
- ANSI A92.2 compliant

Exceptional Reach & Versatility

190 ft (58 m) working height without jib and 202 ft (62 m) with isolating jib, giving crews the ability to handle tall structures and higher utility work with fewer setups.

Powerful, Controlled Lifting

15,000 lb single line pull hydraulic planetary winch with 425′ synthetic rope delivers dependable lifting power, while proportional controls ensure smooth, precise operation.

Safe & Productive Work Platform

36″ x 72″ gravity-leveled steel platform with grounding lugs, safety rails, harnesses, and hydraulic tool connections creates a secure, well-equipped environment for operators.

Built-In Safety & Operator Confidence

Elliott’s ERFSD system slows boom speed at full extension, and the integrated Load Moment Indicator (LMI) with anti-two block protection provides real-time monitoring for safe, efficient performance.

ELLIOTT
A STELLAR COMPANY


E190
E-LINE AERIAL


SPECIFICATIONS

Working Height with Jib	"190' / 58 m
Working Height with Isolating Jib	202' / 62 m
Main Boom Length	170' / 52 m
Working Area	360 Degrees
Lifting Capacity	20,000 lbs / 13 608 kg
Platform Capacity	1,200 lbs / 544 kg
Platform Size	36" x 72" / 91 x 183 cm
Certification	ANSI A92.2
Overall Height	12'11" / 3.9 m
Operator Controls	Ride-Around Seated
Outrigger Type Front	Out-Down 'EZ-CRIB'
Outrigger Spread Front	26'2" / 8 m
Outrigger Type Rear	Out-Down
Outrigger Spread Rear	26'2" / 8 m
Minimum GVWR	108,000 lbs / 48 988 kg

OPTIONS

- Safety Lighting
- Outrigger Pads
- Hydraulic Tank Heater
- Automatic Rotation Lockout
- Below Bed Tool Circuit
- 110v Auxiliary Power
- And more additional options & configurations – contact factory or dealer

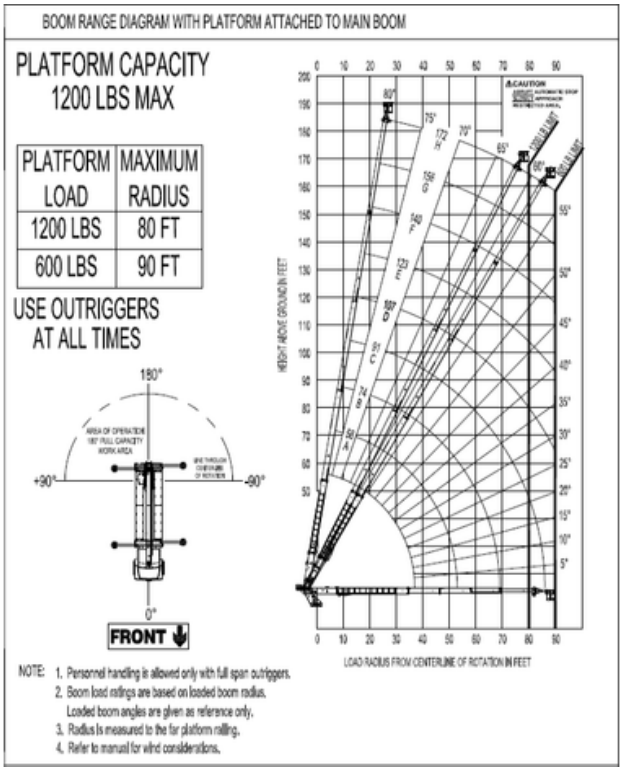

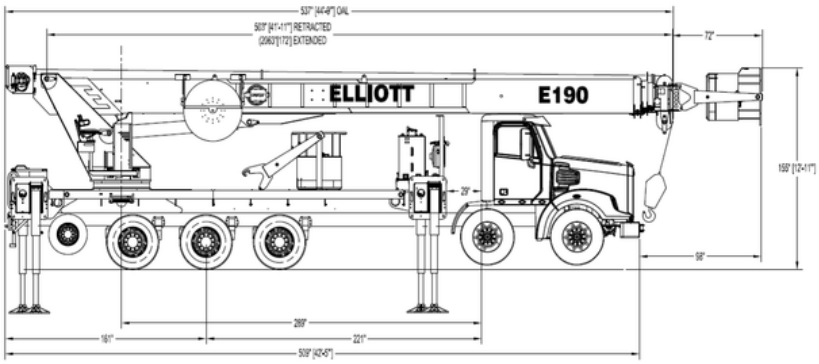

FULL SPECS:

402.592.4500 | SALES@ELLIOTTEQUIP.COM | ELLIOTTEQUIP.COM

BUILT FOR YOU
ELLIOTT
SINCE 1948